



VALPOLYMER

Polyurethane's Elastomers Moulding

HOSESADDLE

PRODUCT FOR SAFEGUARDING PIPES AND OVERHEAD CABLES



- Real protection against accidents, environmental damage and corporate loss.
- Maintenance-free service.
- It's special design prevents hose collapse and kinking, reduce premature hose failures, decreasing the cost of hoses replacement.
- Reduce risk to personnel working under or near a hoisted hose.
- Offers fast implementation with no special tools.
- Manufactured to meet the standards of a comprehensive quality control program as well as the standards of independent regulatory bodies.
- Working range from -40°C to 130°C , ageless and hidrolisys free.
- Resistant to fuel, oil, jet-fuel, most of chemical and petrolchemicals.
- Slings are easily replaced when worn or damaged.
- Sizes from 1 to 12 inches.

Where do you use a hosesaddle?

Sizes 1" to 5"

ueling stations, hydraulic hose, bundled industrial hose, pumping operations, mines and theatrical power cables etc.

Sizes 5" to 12"


offshore dock hose, fish suction hose (reducing bruising dramatically), vacuum hose, material handling hose, food grade hose etc.




Art.	Length cm	Height cm	Weight kg	Capacity kg	I.D Hose cm
VAL 100 ED METAL D.RING	46	4	1,30	800	1" / 2,5
VAL 125 ED METAL D.RING	47	5,5	1,50	800	1.25" / 3,1
VAL 150 ED METAL D.RING	51	5	1,60	800	1,5" / 3,8
VAL 200 ED METAL D.RING	34	6,5	1,00	800	2" / 5,0
VAL 200 D METAL D.RING	34	6,5	1,00	800	2" / 5,0
VAL 200 H HOOK-EYE	34	6,5	1,00	800	2" / 5,0
VAL 300 D METAL D.RING	33,5	9,5	1,20	800	3" / 8,0
VAL 300 H HOOK-EYE	33,5	9,5	1,20	800	3" / 8,0
VAL 400 D METAL D.RING	31,5	12	1,80	800	4" / 10,0
VAL 400 D HOOK-EYE	31,5	12	1,80	800	4" / 10,0
VAL 500 D HOOK-EYE	31,5	12	1,80	800	5" / 12,0
VAL 600 H HOOK-EYE	55,5	17,5	5,5	4.000	6" / 15,0
VAL 800 H HOOK-EYE	77,5	24	12,00	6.000	8" / 20,0
VAL 1000 H HOOK-EYE	104	27	20,00	6.400	10" / 25,0
VAL 1200 H HOOK-EYE	104	27	20,00	6.400	12" / 30,0



D:
with metal ring



H:
hook-eye

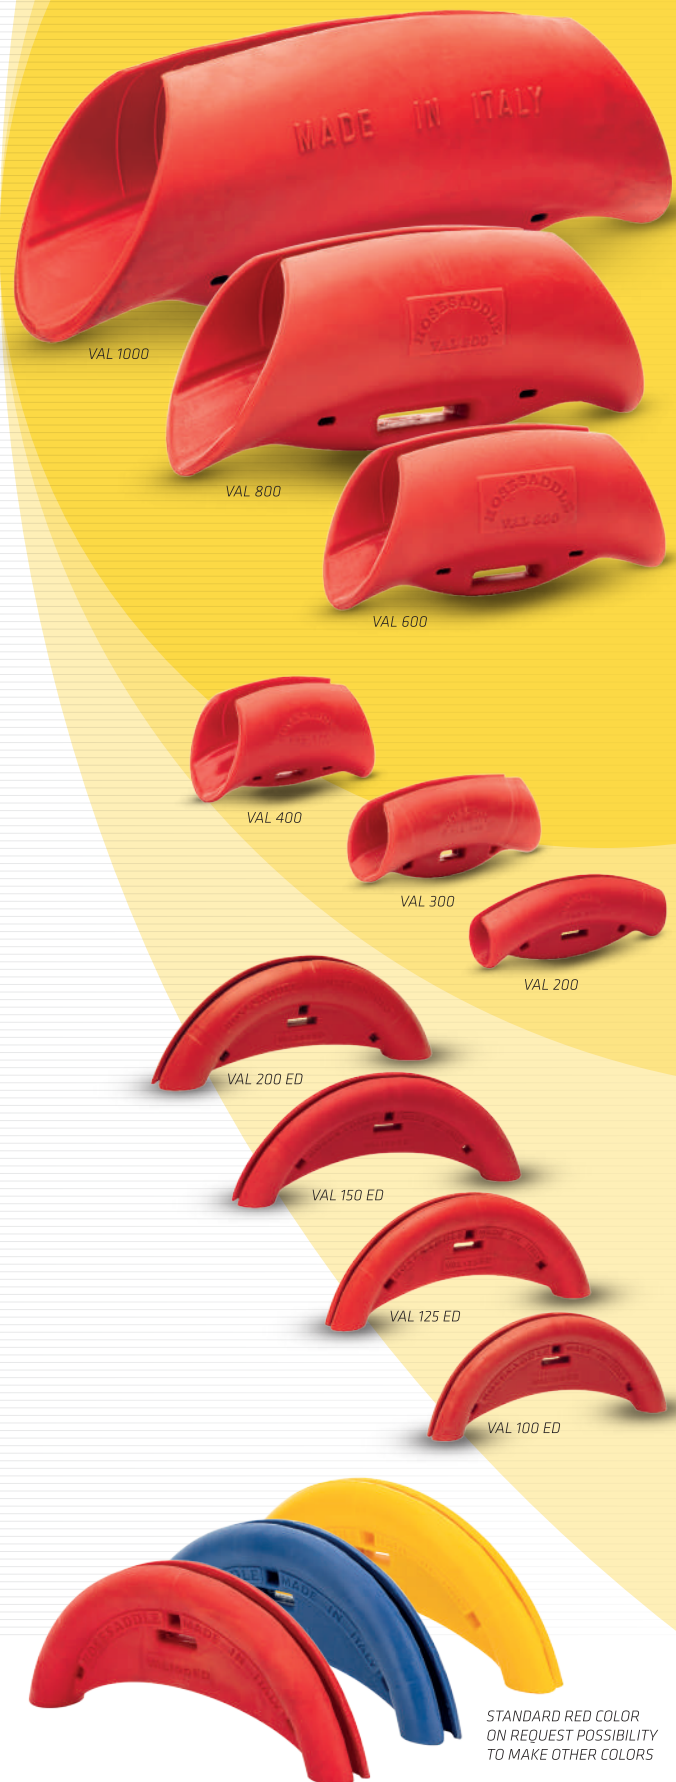

gfi studio

STANDARD RED COLOR
ON REQUEST POSSIBILITY
TO MAKE OTHER COLORS

VALPOLYMER
Polyurethan's Elastomers Moulding

VALPOLYMER srl - Via Alfieri, 1 - 24060 Credaro (BG) Italy
Tel. +39 035 4265011 - Fax +39 035 935203 - info@valpolymer.com - www.valpolymer.com